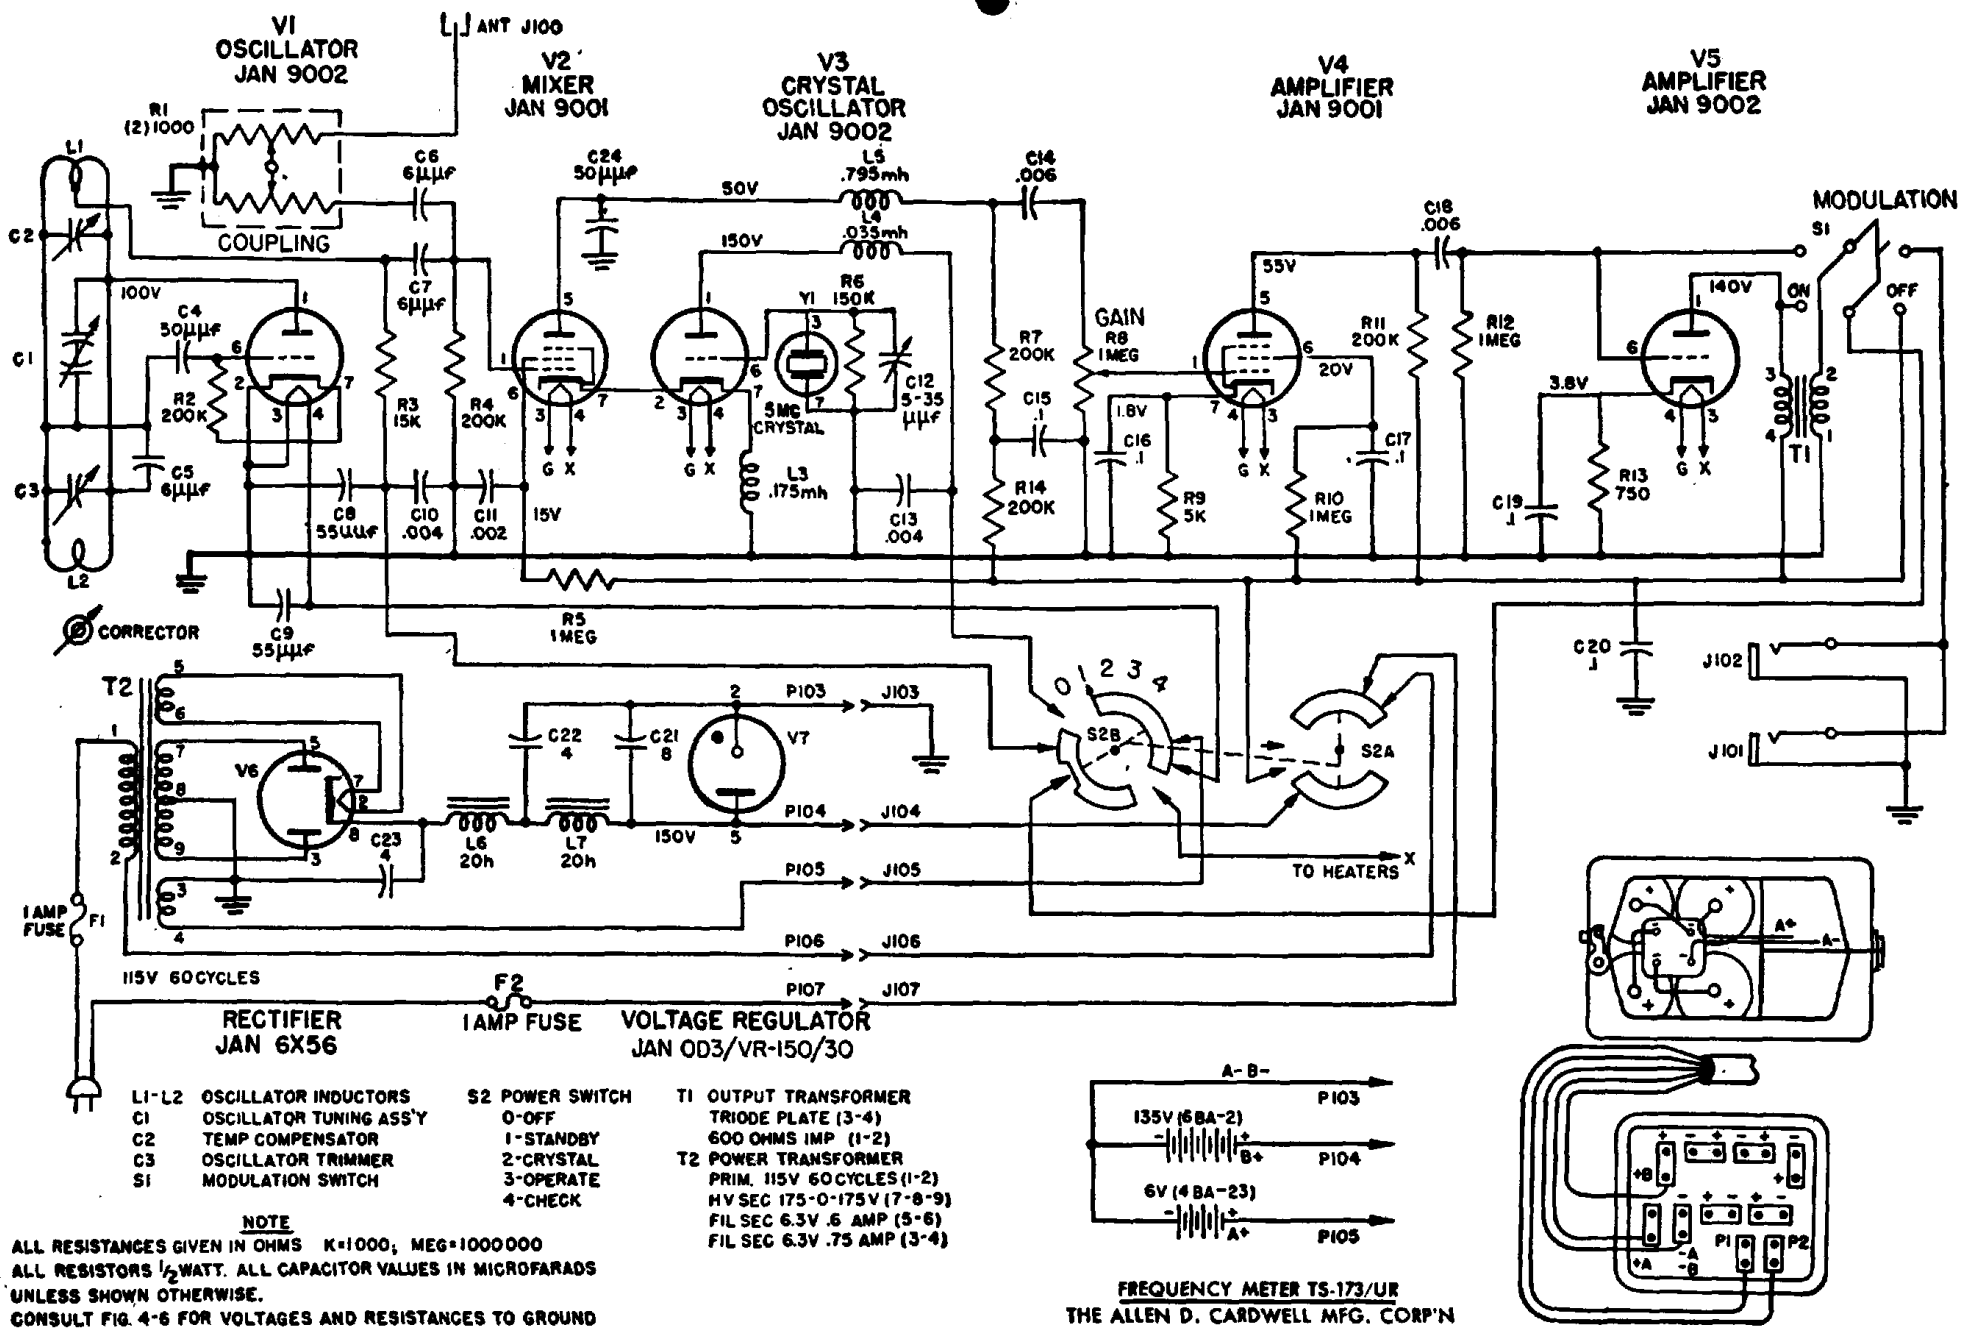

L1-L2 OSCILLATOR INDUCTORS
C1 OSCILLATOR TUNING ASS'Y
C2 TEMP COMPENSATOR
C3 OSCILLATOR TRIMMER
S1 MODULATION SWITCH

S2 POWER SWITCH
0-OFF
1-STANDBY
2-CRYSTAL
3-OPERATE
4-CHECK

T1 OUTPUT TRANSFORMER
TRIODE PLATE (3-4)
600 OHMS IMP (1-2)
T2 POWER TRANSFORMER
PRIM. 115V 60CYCLES (1-2)
HV SEC 175-0-175V (7-8-9)
FIL SEC 6.3V .6 AMP (5-6)
FIL SEC 6.3V .75 AMP (3-4)

NOTE
ALL RESISTANCES GIVEN IN OHMS K=1000; MEG=1000000
ALL RESISTORS 1/2 WATT. ALL CAPACITOR VALUES IN MICROFARADS UNLESS SHOWN OTHERWISE.
CONSULT FIG. 4-6 FOR VOLTAGES AND RESISTANCES TO GROUND

www.everything4lesstore.com
www.everything4lesstore.com